

life-changing
technology

OTICON | **More**
OTICON | **Zircon**

Polaris™ Product Matrix



oticon
life-changing technology

Oticon More™ and Oticon Zircon Style Options

miniRITE R, miniRITE T, miniBTE R, and miniBTE T

Oticon More and Oticon Zircon are built on the innovative Polaris™ platform. All Oticon More and Zircon hearing aids are Made for iPhone® and compatible with the new Android™ protocol for Audio Streaming for Hearing Aids (ASHA) - making it possible to stream directly from iPhone®, iPad®, iPod touch® and select Android™ devices.

miniRITE R - offers a discreet design powered by a rechargeable lithium-ion battery. The style features telecoil and a double push-button.

miniRITE T - offers a discreet design with LED-light to make handling easy. The style features telecoil and a double push-button. It is powered by a disposable zinc air battery.

miniBTE R - is a rechargeable BTE-style. It is powered by a rechargeable lithium-ion battery. The style features telecoil and a single push-button.


miniBTE T - is small in size and fits most ears. It comes with an LED-light for easy handling. The style features telecoil and a single push-button. It is powered by a disposable zinc air battery.



miniRITE R miniRITE T miniBTE R miniBTE T

miniFit receiver options:

Select between three receivers with different output performance, with lengths 0-5 for non-power speakers. Lengths 1-5 are available for power speakers and MicroShell. The new MicroShell offers patients an integrated, custom mold option for non-power receivers. The 105 receiver requires a custom Power receiver mold.



miniFit earpieces:

miniFit earpieces include standard domes and custom molds. MicroMold is available in acrylic, soft silicone, or VarioTherm® material. LiteTip and Corda miniFit molds are available in acrylic and VarioTherm material.







Hook and thin tube for miniBTE:

Select between miniBTE hook, thin tube Corda miniFit 0.9 mm or thin tube Corda miniFit 1.3 mm with one of our miniFit earpieces.




*Color not available for Zircon hearing aids.

Fitting ranges* - miniRITE

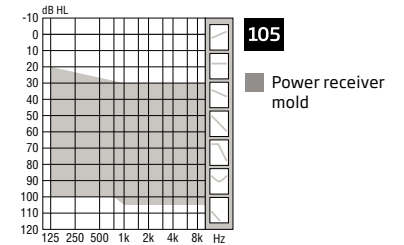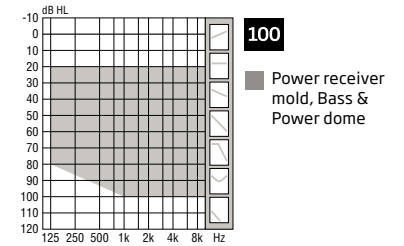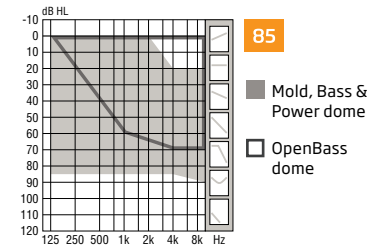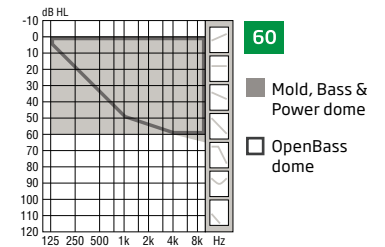

Fitting ranges* - miniBTE

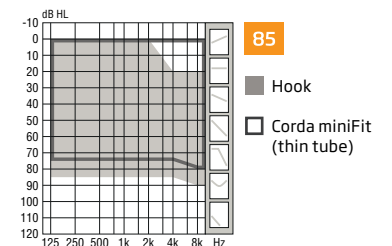

*Fitting range is based on Oticon More 1. Fitting range for More 2, More 3, Zircon 1 & Zircon 2 is limited to 8 kHz. Details available in Technical data sheets.



For information on compatibility, please visit www.oticon.com/support/compatibility

Apple, the Apple logo, iPhone®, iPad®, and iPod touch® are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Android™, Google Play, and the Google Play logo are trademarks of Google LLC.

© VarioTherm is a registered trademark of Dreve

OTICON | More

Product comparison



	Oticon More 1	Oticon More 2	Oticon More 3
Speech Understanding			
MoreSound Intelligence™	Level 1	Level 2	Level 3
Environment configuration	5 Options	5 Options	3 Options
Virtual Outer Ear	3 Configurations	1 Configuration	1 Configuration
Spatial Balancer	100%	60%	60%
Neural Noise Suppression, Difficult / Easy	10 dB / 4 dB	6 dB / 2 dB	6 dB / 0 dB
Sound Enhancer	3 Configurations	2 Configurations	1 Configuration
MoreSound Amplifier™	•	•	•
Feedback Prevention	MoreSound Optimizer™ & Feedback shield	MoreSound Optimizer™ & Feedback shield	MoreSound Optimizer™ & Feedback shield
Spatial Sound™	4 Estimators	2 Estimators	2 Estimators
Soft Speech Booster	•	•	•
Frequency lowering	Speech Rescue™	Speech Rescue™	Speech Rescue™
Sound Quality			
Clear Dynamics	•	•	•
Better-Ear Priority	•	•	•
Fitting Bandwidth†	10 kHz	8 kHz	8 kHz
Bass Boost (streaming)	•	•	•
Processing Channels	64	48	48
Listening Comfort			
Transient Noise Management	4 configurations	3 configurations	3 configurations
Wind Noise Management	•	•	•
Personalization & Optimizing Fitting			
Fitting Bands	24	20	18
Multiple Directionality options	•	•	•
Adaptation Manager	•	•	•
Fitting Formulas	VAC+, NAL-NL1/ NAL-NL2, DSL 5.0	VAC+, NAL-NL1/ NAL-NL2, DSL 5.0	VAC+, NAL-NL1/ NAL-NL2, DSL 5.0
Connecting to the World			
Hands-free communication*	•	•	•
Direct streaming**	•	•	•
Oticon ON app & Oticon RemoteCare app	•	•	•
ConnectClip	•	•	•
EduMic	•	•	•
Remote Control 3.0	•	•	•
TV Adapter 3.0	•	•	•
Phone Adapter 2.0	•	•	•
Special Needs			
Tinnitus SoundSupport™	•	•	•
CROS/BiCROS support	•	•	•

• indicates feature included

† Bandwidth accessible for gain adjustments during fitting

* Available for Oticon More from FW 1.3 with select iPhone® models

** From iPhone, iPad®, iPod touch®, and select Android™ devices

OTICON | Zircon

Product comparison



	Oticon Zircon 1	Oticon Zircon 2
Speech Understanding		
OpenSound Navigator™	•	
- Balancing power effect	40%	
- Max. noise removal difficult/simple	6 dB/0 dB	
Multiband Adaptive Directionality		•
Noise Reduction		•
Speech Guard™	•	
Single Compression		•
Frequency lowering	Speech Rescue™	Speech Rescue™
Sound Quality		
Fitting Bandwidth*	8 kHz	8 kHz
Processing Channels	48	48
Bass Boost (streaming)	•	•
Listening Comfort		
Feedback Management	SuperShield & Feedback shield	SuperShield & Feedback shield
Wind Noise Management	•	•
Transient Noise Management	On/Off	
Personalization & Optimizing Fitting		
Fitting Bands	14	12
Multiple Directionality Options	•	•
Adaptation Management	•	•
Oticon Firmware Updater	•	•
Fitting Formulas	NAL-NL1 / NAL-NL 2, DSL v5.0	NAL-NL1 / NAL-NL 2, DSL v5.0
Connecting to the World		
Hands-free communication**	•	•
Direct streaming***	•	•
Oticon ON app & Oticon RemoteCare app	•	•
ConnectClip	•	•
EduMic	•	•
Remote Control 3.0	•	•
TV Adapter 3.0	•	•
Phone Adapter 2.0	•	•
Special Needs		
Tinnitus SoundSupport™	•	•
CROS/BiCROS support	•	•

• indicates feature included

* Bandwidth accessible for gain adjustments during fitting

** Available for Oticon Zircon from FW 1.1 with select iPhone® models

*** From iPhone, iPad®, iPod touch®, and select Android™ devices





[oticon.com](https://www.oticon.com)

Oticon is part of the Demant Group.

oticon
life-changing **technology**